


**END SECTION**  
SCALE 1:25

**SIDE SECTION**  
SCALE 1:25

**PRODUCT NOTE:**

1. TESTED AND APPROVED FOR INSTALLATIONS UP TO 5000mm DEEP.
2. 300mm RISERS AVAILABLE.
3. LARGE RANGE OF CONCRETE SURROUNDS AND COVERS TO SUIT ALL LOAD RATINGS.
4. MPA RATING FOR GRC - 60 mpa @ 28 DAYS.
5. AVAILABLE EXTRAS:  
-STEP IRONS  
-SUPPORT FRAME & WORK PLATFORMS FOR ABOVE GROUND INSTALLATIONS.
6. OTHER PVC PIPE SIZES AVAILABLE UPON REQUEST
7. INSTALLATION INSTRUCTIONS MUST BE FOLLOWED.
8. COVER WILL ADD TO OVERALL DEPTH.
9. INTERNAL COATING OF ACID RESISTING TAR EPOXY PAINT

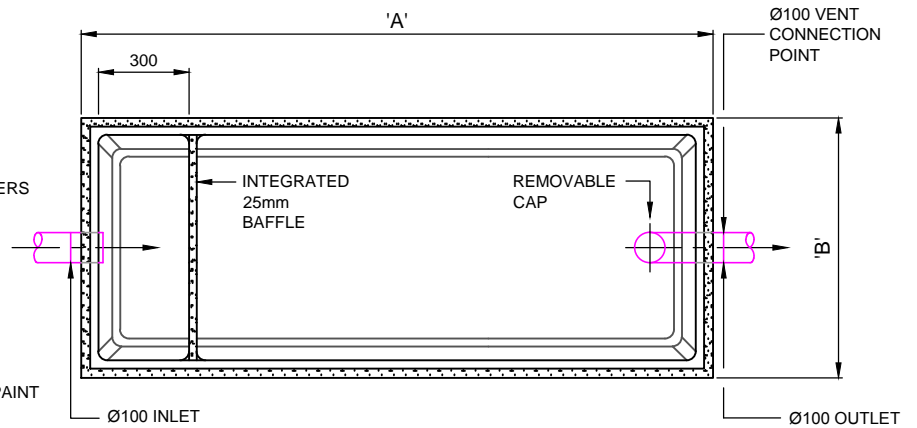

**OPEN TANK PLAN VIEW**  
SCALE 1:25


PRODUCT CODE	CAPACITY (L)	A	B	C	D	E	F	MASS (KG)
VGA 600	600	1000	705	1340	1090	150	225	160
VGA1100	1100	2090	860	1370	825	445	520	490
VGA1500	1500	2090	860	1370	1025	245	320	490
VGA2000	2000	2090	860	1670	1375	195	270	610
VGA2500	2500	2090	860	1970	1675	195	270	730
VGA3000	3000	2090	860	2270	1975	195	270	840

**SPECIFICATION**

Glass Reinforced Concrete Grease Interceptor must be free of steel reinforcement to prevent corrosion.  
 Grease Interceptor to be Mascot Engineering GRC ..... litre, model number VGA ..... complete with Gastight Access Covers to suit Class ..... to AS3996.  
 Products to be installed as per the manufacturers installation instructions

**AUTHORISED FOR USE IN VICTORIA**

© Copyright

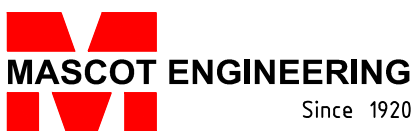

PRODUCT DESCRIPTION:  
**VIC GREASE INTERCEPTOR**

ph: 1300 885 295  
 fax: 1300 885 296  
 email: sales@mascoteng.com.au  
 www.mascotengineering.com.au

SCALE:

**1:25**

REVISION:

**A**

DRAWING NO:

**TW.VIC.VGA.001**