

-FOR WATER CHARGED GROUND REFER TO YOUR PROJECT STRUCTURAL ENGINEER.

END SECTION


SCALE 1:25

SIDE SECTION

SCALE 1:25

PRODUCT NOTE:

- TESTED AND APPROVED FOR INSTALLATIONS UP TO 5000mm DEEP
- 300mm RISERS AVAILABLE.
- LARGE RANGE OF CONCRETE SURROUNDS AND COVERS TO SUIT ALL LOAD RATINGS.
- MPA RATING FOR GRC 60 mpa @ 28 DAYS.
- AVAILABLE EXTRAS:
 - -STEP IRONS
 - -SUPPORT FRAME & WORK PLATFORMS FOR ABOVE GROUND INSTALLATIONS.
- OTHER PVC PIPE SIZES AVAILABLE UPON REQUEST INSTALLATION INSTRUCTIONS MUST BE FOLLOWED.
- COVER WILL ADD TO OVERALL DEPTH. 8.
- RISERS MAY BE REQUIRED TO MEET QLD PLUMBING & DRAINAGE ACT REGULATIONS.

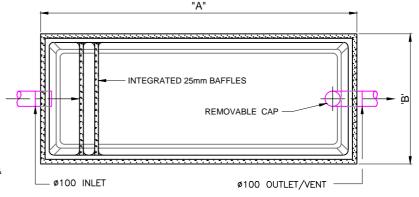

OPEN TANK PLAN VIEW

SCALE 1:25

PRODUCT CODE	CAPACITY (L)	Α	В	С	D	E	F	G	MASS (KG)
QGA 50	540	1200	1200	900	563	225	300	107	280
QGA 100	1000	2050	860	1370	700	575	650	500	500
QGA 150	1500	2050	860	1670	1100	475	550	400	610
QGA 200 *	2000	2050	860	1670	1350	225	300	150	610
QGA 250 *	2500	2050	860	1970	1650	250	300	150	730
QGA 300 *	3000	2050	860	2270	1950	250	300	150	840

SPECIFICATION

Glass Reinforced Concrete Grease Arrestor must be WSAA (Water Services Association Australian) appraised and free of steel reinforcement to prevent corrosion. Grease Arrestor to be Mascot Engineering GRClitre, model number QGAcomplete with Gastight Access Covers to suit Classload rating to AS3996

Products to be installed as per the manufacturers installation instructions

* PLEASE REFER TO NOTE 9.





PRODUCT DESCRIPTION:

GREASE ARRESTOR

ph: 1300 885 295 fax: 1300 885 296

email: sales@mascoteng.com.au www.mascotengineering.com.au

SCALE: REVISION: 1:25 C DRAWING NO: TW.Q.GA.003