


Mascot Engineering

Glass Reinforced Concrete

ACT Grease Arrestor

Revision A

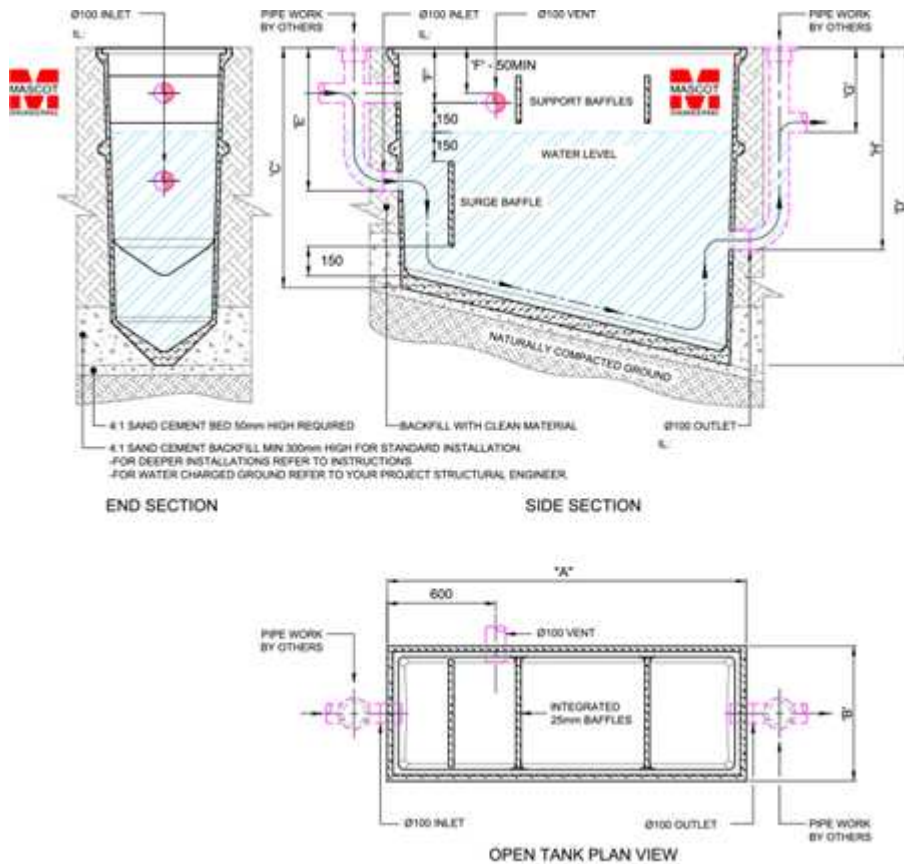

Product Code	Capacity (L)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Mass (kg)
GA100	1000	1830	690	1245	1620	730	280	430	1030	325
GA150	1500	2610	870	1265	1765	730	280	430	1030	677
GA200	2000	2610	870	1565	2065	730	280	430	1060	812
GA300	3000	2610	870	2165	2665	750	300	450	1050	890

- Tested and approved for installations up to 5000mm deep
- 300mm risers available
- Large range of concrete surrounds and covers to suit all load ratings
- MPa rating for GRC: 60 MPa @ 28 days
- Available extras:
 - Step irons
 - Support frame & work platforms for above ground installations

- Other PVC pipe sizes available upon request
- Installation instructions must be followed
- Cover will add to overall depth
- Internally coated with acid resistant tar epoxy paint.
- Confirm with local authority for suitability prior to purchase/install.



37 Tarlington Place,
Smithfield NSW 2164
1300 885 295
sales@mascoteng.com.au
www.mascotengineering.com.au