

Technodrain

Channel Series: Evo B125



Evo 100 GMS B125 (Class B – 125kN)



evo

CODE: TCE100SB31Z


With a heavy duty HDPE channel edge and simple heelproof (10mm) galvanised mild steel grating, this trench drain safeguards you from the heaviest of downpours whilst being pedestrian friendly.

With a Class B load rating, this is ideal for commercial and residential use.

Key Features of Technodrain Evo 100 GMS

- Heelproof 10mm Galvanised Mild Steel Grating
- HDPE Channel with 3mm HDPE integrated edge
- Boltdown & Non-Rocking
- Modular & Pre-Assembled
- Pre-formed outlets in base & side
- End Caps available

Technodrain Evo 100 GMS Specification

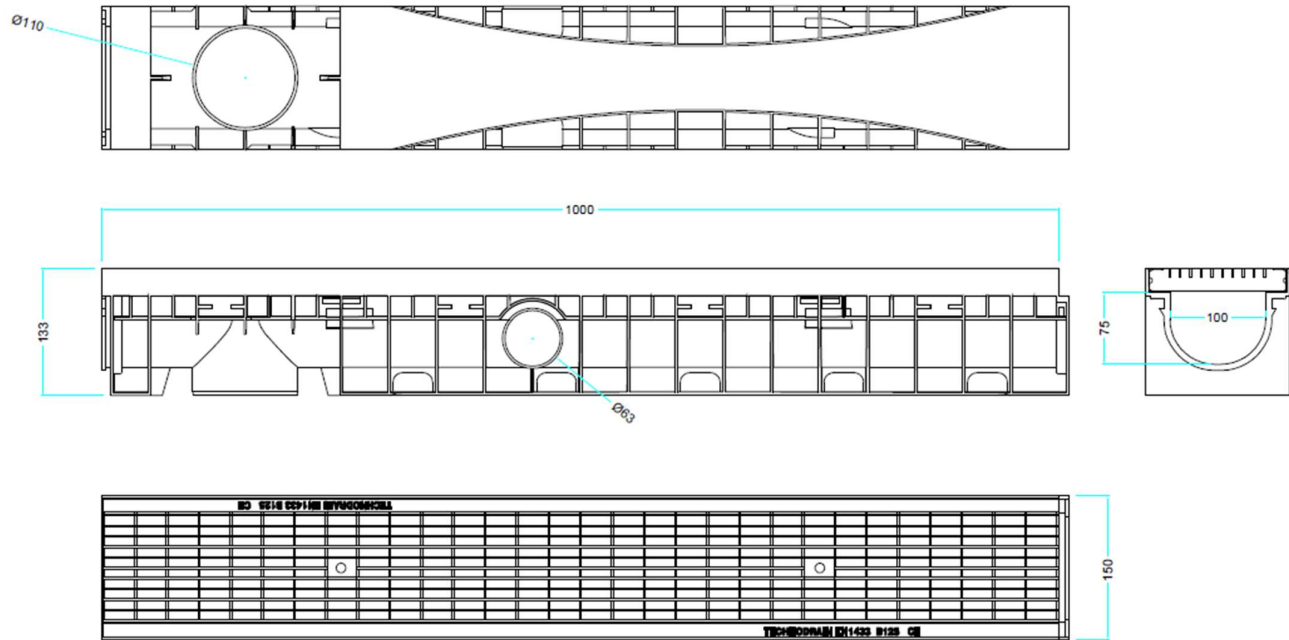

Dimensions and technical specifications

Channel

	Length	Overall Width	Internal Width	Overall Depth	Internal Depth	Edge Rail
Evo 100 Channel	1000mm	150mm	100mm	133mm	75mm	25mm

Heelproof Gate

	Length	Overall Width	Overall Depth	Slot Opening Size	Bolts Per Metre
Evo 100 Heelproof Gate	1000 mm	145mm	25mm	30 x 10 (mm)	2

Made in Italy, Technodrain channel is proudly distributed by Mascot Engineering.

For all enquiries, please contact our sales team on 1300 885 295



Mascot Engineering Co Pty Ltd.
 37 Tarlington Place, Smithfield NSW 2164
 Ph 1300 885 295 | sales@mascoteng.com.au
 www.mascoteng.com.au
 SYDNEY | MELBOURNE | BRISBANE | PERTH | NEWCASTLE

Note: Details correct at time of publication and subject to industry tolerances. Refer to terms of use on website for more. Load rating details available at www.mascoteng.com.au/technical-support/load-ratings-as3996/