

Technodrain

Wavedrain B125 (Class B load equivalent)



CODE: WD110BGS

With a classic and timeless ductile iron grate forged in its unique, restrained wave pattern, this drainage solution will withstand residential traffic (Class B) with ease.

Key Features of Technodrain Wavedrain

- Heelproof 6mm Ductile Iron Grating
- PE-PP Channel
- Boltdown & Non-Rocking
- Modular & Pre-Assembled
- Pre-formed outlets
- End Caps, 4 way corner boxes & in-line pits available




Technodrain Wavedrain B125 Specification

Total Data	Channel	Ductile Iron Grating
Length (mm)	1.000	Length (mm) 500
External Width (mm)	120	External Width (mm) 115
Internal Width (mm)	90	Height (mm) 20
External Height (mm)	110	Slot Size (mm) 6
Internal Height (mm)	80	Drainage open area per linear metre (cm ²) 327
Protection edge high (mm)	20	Lock system to the channels with 2
Drainage Section (cm ²)	65.1	HDPE tie bars and bolts
Volume (dm ³)	6.51	Loading Class B125 (EN 1433)
Vertical Outlets	1xDN 110, 1xDN 100	
Tongue and Groove Joint		

Total weight (channel + gratings)

6kg

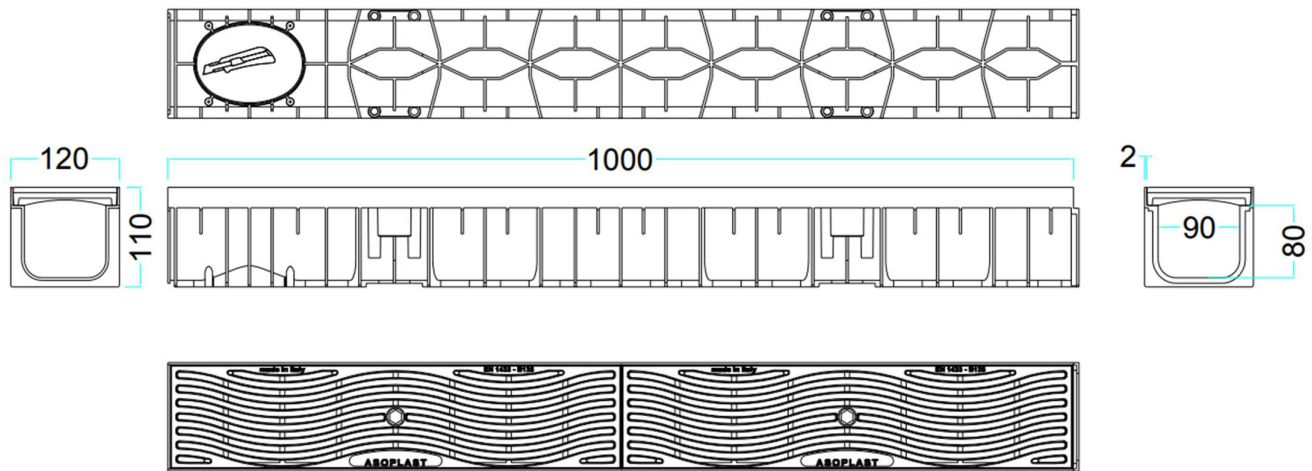

Made in Italy, Technodrain channel is proudly distributed by Mascot Engineering.

For all enquiries, please contact our sales team on 1300 885 295.



Mascot Engineering Co Pty Ltd

National Head Office: 37 Tarlington Place, Smithfield NSW 2164

Ph: 1300 885 295

sales@mascoteng.com.au

mascoteng.com.au

Sydney | Melbourne | Brisbane | Perth | Newcastle